

specification sheet

Application : portable solar charger for electronic devices

Power : 6.75 W

Operating voltage (Vmpp) : 15 V*

Operating current (Impp) : 450 mA *

Open circuit voltage (Voc) : 23 V *

Short circuit current (Isc) : 600 mA*

Rolled dimensions : 350 mm x Ø 65 mm

Unrolled dimensions : 350 mm x 900 mm

Thickness : 1.2 mm

Temperature operating range : -20°C to +60°C

Weight : 700 g

Connector : universal cigarette lighter socket (male and female)

Available accessories: AA and AAA battery charger, cigarette lighter adaptor for mobile phones, PDA's and USB connections

CE Approval

* measured at Standard Testing Conditions (STC), 1000W/m², AM 1.5, 25°C



sunpack 3 years warranty
 solar energy for portable electronic devices




rollable



do not fold



weatherproof

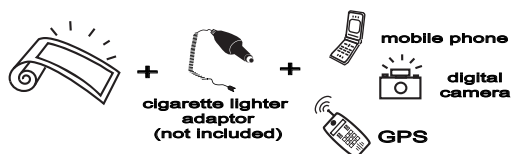

easy plug



easy parallel connection

mobile phone, standard GPS, PDA, MP3 player, smart phone, camcorder, digital camera, satellite phone

7 W 15 VDC 450 mA / battery capacity (mAh) :	600	900	1200	1500	2000
charging time in hours (measured in full sunshine)	1h20	2h00	2h40	3h20	4h30
2 x 7 W connected in parallel (15 VDC 900mA)	0h40	1h00	1h20	1h40	2h15